

# eFlex 3.1m – for Buildings & Mobility




## Description

The eFlex is a flexible and lightweight solar panel designed for integration into roofs, structures with low-load bearing capacity, mobility applications on trailers, RVs, boats and many more demanding applications.

## Features

- Most elegant and aesthetic solar module, beautiful uniform design
- High energy yield due to excellent shadow tolerance and temperature stability
- Applicable for curved surfaces – bendable
- Ultra-low weight, < 2kg/m<sup>2</sup>
- Unbreakable & robust - no glass, no micro cracks
- EL tested
- Made in Switzerland
- Available in 0.8m, 1.6m, 2.3m and 3.1m length

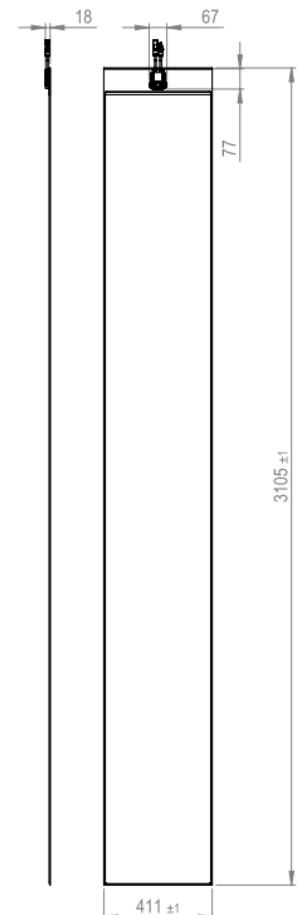

# eFlex – for low-load bearing roofs



Dimensions		
Length	[mm]	3105 ±2
Width	[mm]	411 ±2
Thickness of module	[mm]	2.2
Thickness at J-Box	[mm]	21 ± 1
Weight of panel	[Kg]	2.4
Weight of panel incl. adhesive	[Kg]	3.3

Electrical characteristics at STC <sup>1</sup>			FF 100	FF 105	FF 110	FF 115	FF 120 <sup>2</sup>
Power classes							
Nominal power	P <sub>mpp</sub>	[W]	100	105	110	115	120
Power Tolerance		[W]	-0/+5	-0/+5	-0/+5	-0/+5	-0/+5
Voltage at nom. power	V <sub>mpp</sub>	[V]	34.0	34.5	35.1	35.7	36.2
Current at nom. power	I <sub>mpp</sub>	[A]	2.96	3.04	3.13	3.22	3.31
Open circuit voltage	V <sub>oc</sub>	[V]	46.9	47.3	47.8	48.2	48.6
Short circuit current	I <sub>sc</sub>	[A]	3.86	3.89	3.92	3.96	3.99
Max. system voltage	IEC	[V]			1000		
Max. serial fuse rating		[A]			10		

Thermal characteristics			
Temperature coefficient	V <sub>oc</sub>	[%/°C]	-0.3
Temperature coefficient	I <sub>sc</sub>	[%/°C]	0.01
Temperature coefficient	P <sub>mpp</sub>	[%/°C]	-0.35

Operating conditions		
Temperature range	[°C]	-40 to +85
Max. mechanical load		2400 Pa, 245 kg/m <sup>2</sup>

Additional data	
Cell type	Flexible CIGS
Junction box	Front side including bypass diode, IP65 & IP67, MC4 type / MC4 connectors, 900mm long cable (4 mm <sup>2</sup> )
Packaging	3140x810x600 mm (LxWxH), 25 units, 90 kg (110kg for panels incl. adhesive), Boxes can be stacked 3 boxes high.

Warranty & certification	
Performance guarantee	10 years on 90% of P <sub>mpp</sub> under STC <sup>1</sup> & 20 year on 80% of P <sub>mpp</sub> under STC <sup>1</sup>
Warranty	5 years' workmanship after delivery date
Certification	EN IEC 61646; EN IEC 61730-1 & -2
Safety class	II

## Notes

<sup>1</sup> STC: 1000 W/m<sup>2</sup>, AM1.5G, 25°C, stabilized module state

<sup>2</sup> Not covered under current certifications

We continuously develop our products. Electrical and physical properties subject to change without prior notice.